

## AGXCEL CHECK VALVES


(Read Instructions Completely before Beginning Installation)

### Check Valves

#### 10 lb check valve with 3/8" hose barbs

PN - 313

The recommended check valve for most **AgX installations** is the 10 lb check with 3/8" hose barbs. This works with 3/8" rubber hose which AgXcel recommends for most applications over 10 GPA on 30" rows. The recommended minimum system operating pressure for this check is 20 psi, to ensure all checks open fully.

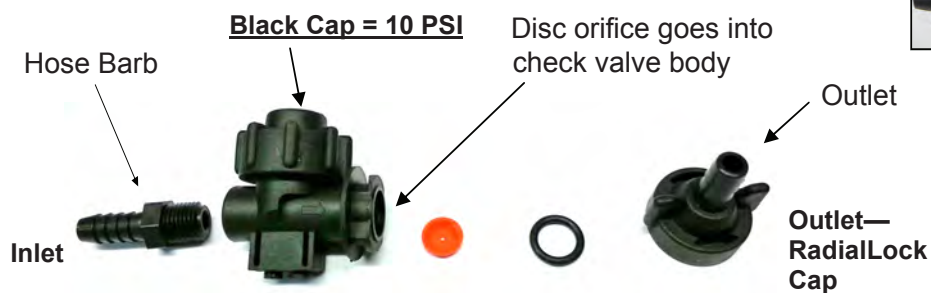

Components  
Liquid



FLOW →

**GX5**

#### 4 lb check valve with 1/4" quick connect fittings

PN - 310

4 lb check valves are typically used with **GX electric pump systems**. AgXcel recommends this valve for use with 1/4" tubing applying up to 10 GPA on 30" rows. The recommended minimum system operating pressure for this check is 10 psi, to ensure all checks open fully.



FLOW →

GX Electric  
Pump Systems